


PULL DOG

From *HANDS ON* Nov/Dec 83

Delight the toddler in your life with this cute little puppy. He loves to chase and nip at the heels of children who squeal with joy. Here's how to make it.

Transfer the pattern to 1/2" stock. Note that there are three pieces and they overlap at the finger joints. Cut out the dog body on the band-saw or jigsaw. Next, put the pieces together and drill a 1/8" hole for the 1/8" dowel hinge pin. Sand the body of the dog, rounding off all edges, and round the joints. Glue the hinge pins in place. Cut the 3/4" x 3/4" x 3-1/4" wheel holders and form the 1/2" wide x 3/8" deep dadoes in them. Glue and clamp the dog body to the axle holders. After the glue has dried, clamp the dog to the worktable and use the horizontal boring mode to drill the 5/16" axle holes. You can make your own wheels with a hole saw, turn them on the lathe, or buy wheels at a craft store. Attach them to the axle with glue. Paint the dog with nontoxic paints. Cut ears out of vinyl or leather and attach with glue. Finally, mount a screw eye in the front for the pull string.

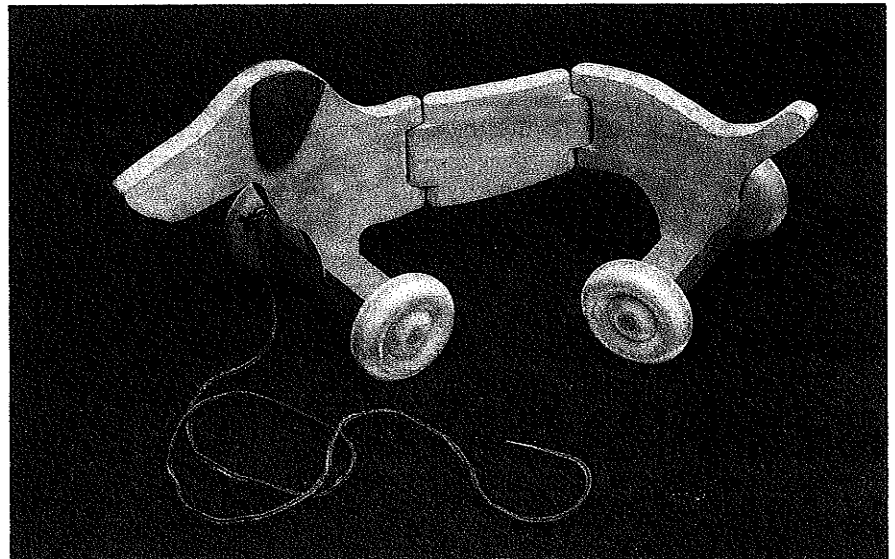

ONE SQUARE = 1/2"

